

SAW devices exploiting Palladium layer properties for selective detection of hydrogen

Meddy VANOTTI, Virginie BLONDEAU-PATISSIER, David RABUS, Loic RICHARD, Sylvain BALLANDRAS

Time and frequency Department

FEMTO-ST Institute

Besançon, France

Email: meddy.vanotti@femto-st.fr, virginie.blondeau@femto-st.fr, david.rabus@femto-st.fr,
loic.richard@femto-st.fr, sylvain.ballandras@femto-st.fr

Abstract—For an increasing number of application (energy production, car industry, space, etc.), hydrogen represents a solution of the future as it is the most common body in the Universe (and therefore on Earth). However, due to its unstable properties, a particular care must be dedicated to control possible gaseous leaks close to tanks and facilities using this resource. In this paper, surface acoustic wave sensors are proposed for detecting gaseous hydrogen in standard environmental conditions (atmospheric pressure and room temperature). The proposed SAW sensors consists in two Rayleigh-wave delay lines built on Quartz, one equipped with a Palladium overlay and the other exhibiting a free path between the two interdigitated transducers used to generate and detect the acoustic wave. The adsorption/absorption of hydrogen in palladium will briefly be exposed and the way the response of the sensor is impacted will be discussed. A specific gas test cell has been developed to test various sensor configurations submitted to hydrogen-composed atmospheres. A particular care was paid to avoid hydrogen leakage in the working environment and to perform the regeneration of the gas absorbing layer. The developed device allows for identifying different concentrations of hydrogen diluted in N_2 and is also able to detect H_2 in current atmosphere. An analysis of the sensor operation is proposed to conclude the paper.

Index Terms—gas sensors; hydrogen; SAW device; Rayleigh waves.

I. INTRODUCTION

The raising shortage of fossil energy resources added to the increasing concern towards environmental issues have led to consider hydrogen as one of the most promising energy resource. This odorless and colorless gas being highly explosive over 4% concentration in air, the availability of a fast and accurate detection system close to storing facilities and equipping hydrogen-operated machines is mandatory for obvious security reasons. Such a system must exhibit a significant selectivity as it must detect the presence of gaseous hydrogen in air with concentrations smaller than the above-mentioned critical limit at standard conditions (room temperature and atmospheric pressure) as well as in harsher environment (very low or significantly high temperature). Although some commercial solutions have been proposed, the current availability of such a detection system meeting modern specifications of hydrogen use and storage is still questionable. The mains aspects to improve for such sensors are their sensitivity, their selectivity and their reliability together with sensor size, cost reduction, energetic needs and response time [1]. Many methods of

detection of hydrogen and a comprehensive review can be found in the litterature [2], providing a substancial material base to try and address the above challenges. Among the possibilities, SAW devices have been studied from long time as it can be seen in [3] [4] [5].

In this paper, surface acoustic wave (SAW) sensors are proposed for detecting gaseous hydrogen in standard environmental conditions (atmospheric pressure and room temperature). The proposed SAW sensor consists of two Rayleigh-wave delay lines built on Quartz, one equipped with a Palladium (Pd) overlay and the other exhibiting a free path between the two interdigitated transducers (IDTs) used to excite and detect the acoustic wave. These IDTs are built using aluminum electrodes as this metal is konwn to be inert versus gaseous hydrogen. The delay lines are monitored in parallel using a synchronous detection approach (monitoring the phase changes along time in a phase-locked-loop strategy).

These sensors have been tested in a specific gas cell developed to experiment with various sensor configurations submitted to hydrogen-composed atmospheres. A particular care has been dedicated to avoid hydrogen leakage in the working environment and to promote the gas absorbing layer regeneration. The developed device allows for identifying different concentrations of hydrogen diluted in N_2 and is also able to detect H_2 in current atmosphere.

An analysis of the sensor operation is proposed to conclude the paper. Particularly, the adsorption/absorption of hydrogen in Pd will briefly be exposed and the way the response of the sensor is impacted will be discussed.

II. EXPERIMENTS

Selective detection of hydrogen at room temperature and pressure have been achieved with SAW delay lines using Rayleigh waves on AT-cut Quartz. The sensor structure correspond to a differential set-up in ,which a sensitive track is achieved by depositing a Pd layer in between two IDTs whereas the reference track surface is left free to detect non-specific gas/surface interaction. Along this approach, one can significantly increase the sensitivity of the device and its robustness to correlated perturbations (temperature, vibration, non-specific adsorption). The configuration of both generation and detection IDTs used for the sensor consist in 50 fingers

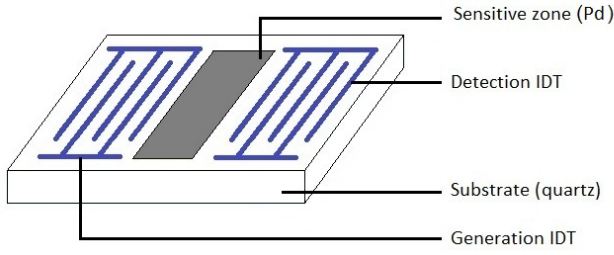


Fig. 1. Scheme of a SAW delay line using Rayleigh surface acoustic wave at 78MHz.

pairs with a grating period of $10 \mu\text{m}$ and a center-to-center spacing of 5mm (the reacting surface). The wavelength is $40\mu\text{m}$, yielding a frequency operation in the vicinity of 78MHz as the wave velocity approaches $3100\text{m}\cdot\text{s}^{-1}$. The Pd film was deposited by thermal evaporation on a single run and shaped by a lift-off technique. Its length along the propagation path was 3mm and its thickness equal to 300nm . The device configuration is shown on Fig.1.

Using a network analyzer, the transfer function of the device can be easily determine and hence the phase shift induced by gas absorption has been monitored that way. However, the use of a dedicated electronics has been experienced and delivers similar information [6]. This system actually operates as a network analyzer to detect the optimal operation condition (zero phase at maximum bandpass amplitude) and then tracks the phase shift in a phase-locked-loop protocol to keep the excitation frequency meeting the above condition. The sensitivity of the set-up allows for some tenths milli-degrees resolution. The response of the bare device and the functionalized one are respectively measured. This configuration has been used so as to make a systematic characterization of each new device used to make the detection. Fig.2 illustrates the way the phase shift measurement is achieved.

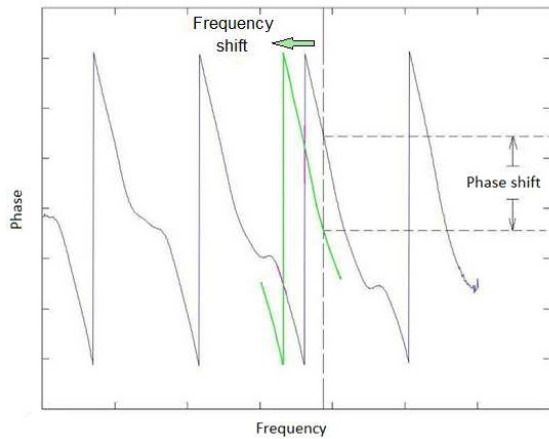


Fig. 2. Phase shift measurement principle using a dedicated instrumentation.

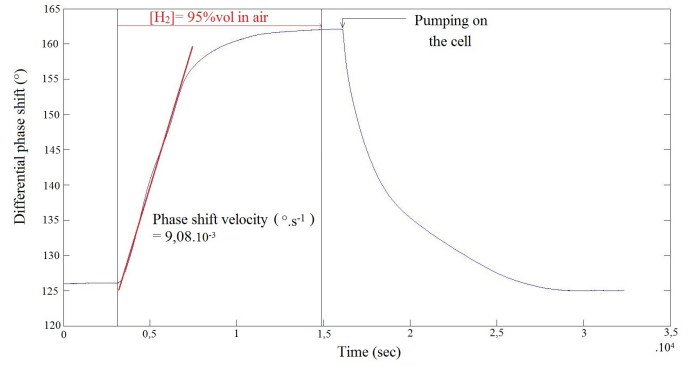


Fig. 3. Detection of hydrogen at high concentration in air.

A. Detection of hydrogen at room temperature and atmospheric pressure.

Hydrogen detection in the percent order have been achieved at room conditions. Fig.3 and 4 present experimental results when using either nitrogen or air as carrier gas. As it can be observed in Fig.4, the detection of about 95%vol of hydrogen in air at 35% RH and 20°C can be achieved with a response delay of about 20 seconds considering that the determination of the H_2 concentration in the melting gas is made using the phase shift velocity upon the exposure and not from the steady state. It is notable that this value depends on a large part on the performance of the hydrogen generation setup. Therefore, the intrinsic response delay of the device is expected to be shorter. Fig.3 shows that the device allows for identifying different concentrations of hydrogen diluted in a nitrogen flow of 100sccm .

III. ANALYSIS OF HYDROGEN ABSORPTION ON PD FILMS AND ITS INFLUENCE ON SAW PROPAGATION.

Absorption of hydrogen into Pd layer induce modifications of the propagating conditions of the surface acoustic wave that lead to the modification of the physical characteristics of this wave (especially its phase velocity). It has been shown [7] that the two main parameters that influence the phase velocity change of elastic waves are mass- and elastic-loading as it can be seen on the equation bellow. Since only devices using quartz substrates have been used here, changes in electrodes conductivity is not consider as possible origin of the observed phenomena and therefore will not be taken in account. Electromechanical coupling of Rayleigh waves on Quartz substrates is atually smaller enough to consider conductivity changes negligible.

$$\begin{aligned} \frac{\Delta\nu}{\nu} = & \left(\frac{\pi h}{2\lambda} \right) \left[-\frac{\Delta\hat{\rho}}{\hat{\rho}} \{ (A_x^2 + A_y^2 + A_z^2) \hat{\rho} \nu_0^2 \} \text{mass-loading term} \right. \\ & \left. + \frac{\Delta\hat{C}_{44}}{\hat{C}_{44}} \{ (4A_z^2 + A_x^2) \hat{C}_{44} \} \text{elastic-loading term} \right. \\ & \left. + \left\{ \frac{\left(1 - \frac{\Delta\hat{C}_{44}}{\hat{C}_{44}} \right)^2}{\left(1 - \frac{\Delta\hat{C}_{11}}{\hat{C}_{11}} \right)} - 1 \right\} \left(4A_z^2 \frac{\hat{C}_{44}^2}{\hat{C}_{11}} \right) \right] \text{elastic-loading term} \end{aligned}$$

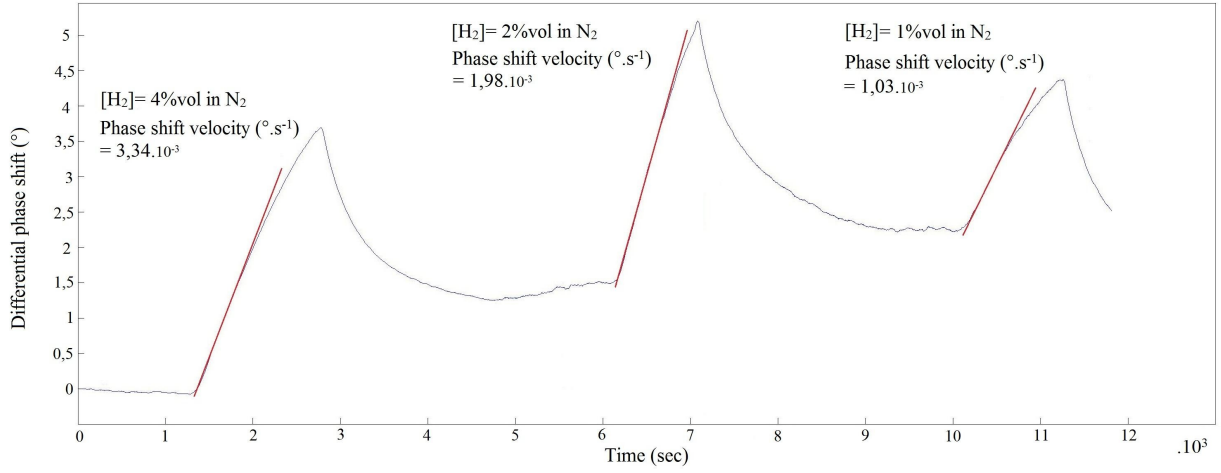


Fig. 4. Detection of hydrogen in the range 4% to 1%vol in N₂.

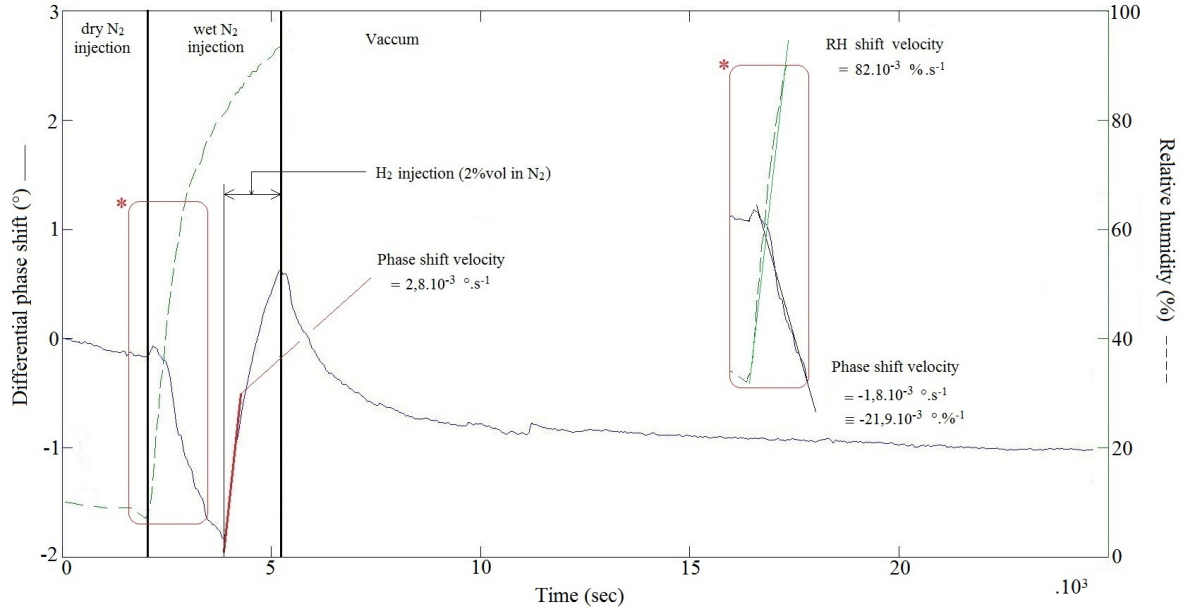


Fig. 5. Influence of humidity on the detection of hydrogen.

In case of hydrogen adsorption on Pd, the mass density $\hat{\rho}$ and the elastic constants (\hat{C}_{11} and \hat{C}_{44}) are both increased after the phase change from Pd (α -phase) to PdH_{0.66} (β -phase). The values of normalized mechanical displacement A_i for palladium are reported in [8] and [9]. Numerical calculations of hydrogen absorption in Pd layers [7] predict an increase of \hat{C}_{44} elastic constant, yielding an increase of the phase velocity of the Rayleigh wave propagating under such an overlay. These calculations are in agreement with the experimental observations presented in this paper.

IV. THE INFLUENCE OF HUMIDITY AND TEMPERATURE ON HYDROGEN DETECTION.

As SAW devices are known to suffer from interference due to humidity and temperature, the influence of these parameters on the sensor operation is exposed here. The observations reported in this section are expected to provide information allowing for the improvement of the differential acquisition setup. One can see in Fig.5 that an increase of the relative humidity (RH) of the injected gas causes a mass-loading effect that results in a decrease of the measured phase of the delay line. Indeed, the adsorption of condensed water onto the device leads to a raise in the density $\hat{\rho}$ of the Pd layer. From the previous equation, this behavior is expected to induce a positive value of $\frac{\Delta\nu}{\nu}$ causing the decrease of the phase velocity

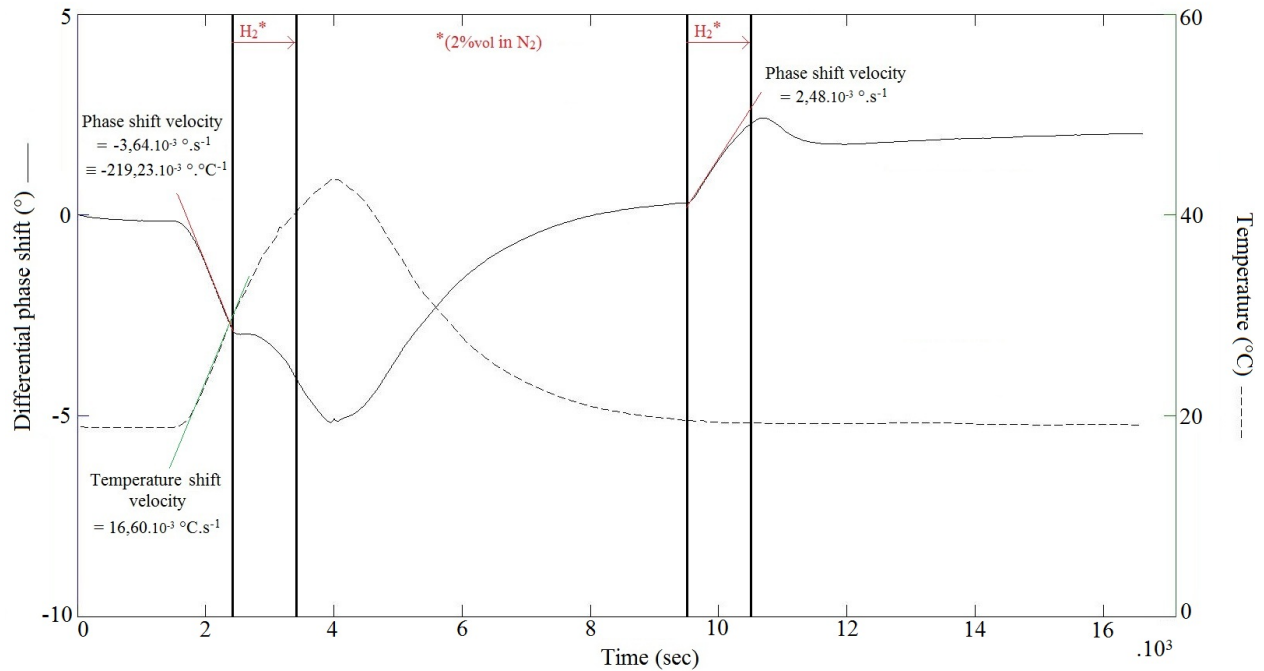


Fig. 6. Influence of temperature on the detection of hydrogen.

as experimentally observed.

Fig.6 evidences the impact of temperature variations on the capability of the SAW sensor to detect hydrogen at atmospheric pressure. Temperature changes lead to a shift down of the delay line synchronism frequency characterized by a sensitivity of $-219.10^{-3} \text{ } ^\circ\text{C}^{-1}$. That phase decrease totally compensates the phase shift toward the high frequency observed when detecting hydrogen in absence of any temperature changes. It appears that the delay line used as a reference do not undergoes any phase shift when exposed to heated gas since the device is temperature compensated. Nevertheless, after Pd covering the device used as sensor yields sensitivity to temperature. This behavior currently constitute an obstacle to hydrogen detection but can be avoided by the use of an appropriate reference. Simulations are expected to provide the informations needed for the development of such a system. As one can see on the second part of the graph, the detection of H_2 at 2%vol in N_2 is still clearly possible considering a stable operation temperature at room conditions.

V. CONCLUSION

In this paper, a differential SAW sensor based on Rayleigh wave on Quartz has been developed and successfully tested. The sensor consist of two adjacent delay lines, one being used as a reference and the second one being fonctionnalized with a Pd overlay, a metal known to be affected by gaseous Hydrogen. The observation of specific phase shifts on the sensitive track compared to reference in presence of gaseous Hydrogen using different gas carrier did assess the operation of the sensor. The use of the Pd overlay actually allows to segregate the nature of

the gas inserted in the reaction cell and provides quantitative information about its composition. The impact of temperature and humidity on the sensor operation also were analyzed. Although the diffrenetial nature of the sensor is expected to reject such interferences, it appears necessary to control this parameters at very minimum. Concerning the analysis of the sensor operation itself, some work still has to be carried opt even if strong convictions arise from the experiment that the main change is related to the elastic properties of the Pd film due to Hydrogen absorption. The crystalline structure of the film having an effective influence on the way hydrogen interact with the metallic film, it still has to be determined in order to improve simulation accuracy of the leverage of hydrogen absorption on the SAW device response.

REFERENCES

- [1] "Identifying performance gaps in hydrogen safety sensor technology for automotive and stationary applications," *International Journal of Hydrogen Energy*, vol. 35, no. 1, pp. 373 – 384, 2010.
- [2] "Hydrogen sensors a review," *Sensors and Actuators B: Chemical*, vol. 157, no. 2, pp. 329 – 352, 2011.
- [3] "Palladiumsurface acoustic wave interaction for hydrogen detection," *Appl. Phys. Lett.*, vol. 41, p. 300, 1982.
- [4] "Bilayer structure for hydrogen detection in a surface acoustic wave sensor system," vol. 82.
- [5] "Identifying performance gaps in hydrogen safety sensor technology for automotive and stationary applications," *Sensors and Actuators B: Chemical*, vol. 161, no. 1, pp. 341 – 348, 2012.
- [6] "A high sensitivity open loop electronics for gravimetric acousticwave-based sensors," *EFTF Proceeding*, 2010.
- [7] "Elastic properties of thin-film palladium for surface acoustic wave (saw) sensors," *Sensors and Actuators B: Chemical*, vol. 23, no. 23, pp. 203 – 208, 1995.
- [8] "Acoustic fields and waves in solids," Wiley, pp. 271 – 332, 1973.
- [9] "Microwave acoustic handbook," *Air Force Cambridge Research Laboratories (distr. NTIS)*, vol. 1A, no. Report AFCL-TR-73-0597, 1973.