Development of an automated MBT toolchain from UML/SysML models

Jonathan Lasalle · Fabien Peureux · Frédéric Fondement

Received: date / Accepted: date

Abstract This paper reports about the VETESS project results and experience with building a Model-Based Testing toolchain to validate automotive embedded systems. This approach, based on existing test generation and test execution tools, makes it possible to automatically derive and execute functional test cases from UML or SysML models. This process is composed of the following steps: modeling (UML or SysML functional view), abstract test case generation (symbolic execution of the model), concretization (generation of executable test scripts from abstract test cases) and analysis (assignation of the test verdict). This process is automated by a toolchain based on Topcased modeler, Smartesting test generator and Clemessy TestInView. This developed prototype made it possible to demonstrate that Model-Based Testing from UML/SysML models is an efficient way to automate testing process for systems mixing software and hardware parts.

Keywords Model-Based Testing \cdot Automated testing process \cdot UML/SysML notations \cdot Embedded systems

J. Lasalle \cdot F. Peureux

LIFC - Université de Franche-Comté, 16 route de Gray, 25030 Besançon, France

Tel.: +33 (0)3 81 66 66 63

 $E-mail: \{jlasalle,fpeureux\}@lifc.univ-fcomte.fr$

F. Peureux

Smartesting R&D center,

18 rue Alain Savary, 25000 Besançon, France

Tel.: +33 (0)3 81 80 47 62

E-mail: fabien.peureux@smartesting.com

F. Fondement

MIPS - Université de Haute-Alsace,

12 rue des Frères Lumière, 68093 Mulhouse, France

Tel.: +33 (0)3 89 33 69 78

E-mail: frederic.fondement@uha.fr

1 Introduction

Model-Based Testing approach (MBT) aims to derive test cases from the specification of the System Under Test (SUT) [18]. This behavioural model describes the stimuli of the environment and the corresponding effects regarding the SUT. The generic process of MBT is depicted on the figure 1. The first step of this approach consists to specify a model that captures the functional behavior of the SUT. From this specification, an (semi-) automatic tool generates test cases, which can be seen as an abstract execution trace of the system. These test cases are abstract because they are defined at the same abstraction level than the model of the SUT. Afterwards, a concretization step makes it possible to produce, from the abstract test cases, test scripts that can be directly executed either on a simulation platform of the system, or directly on the concrete system to be tested. The automation of such test generation process is a strategic issue since it can replace the (so current) manual development of test cases, which is known as costly and error-prone [22,4].




Fig. 1 Model-Based Testing process.

This paper reports about the results and our experience with building an MBT toolchain prototype using UML or SysML notation to describe the SUT. This prototype, based on the existing MBT solution provided by the company Smartesting, is intended to demonstrate the proof-of-concept that MBT process can increase testing process automation within automotive embedded system domain. Nowadays, these systems are mainly developed according to the traditional V cycle, where validation activities start only when implementation and integration are completed. Therefore, major quality issues are not found until integration and validation steps, and they are more difficult and more expensive to fix. In this context, this work aims to show that MBT approach from UML (and SysML) notation is a relevant way to test hybrid architecture (systems mixing software and hardware aspects) early and in an automated way.

This work was supported by the project VETESS (from September 2008 to August 2010) and labelled by the French competitiveness cluster "automotive of future" ¹. This project has rallied the three companies Smartesting² (MBT software editor), Clemessy³ (testing bench provider) and PSA⁴ (car manufacturer), and the two academic laboratories MIPS⁵ (Model Driven Engineering expertise) and LIFC⁶ (MBT expertise).

The remainder of this paper is organized as follows. Section 2 gives an overview of the toolchain developed within the project VETESS to support MBT approach. Section 3 describes the proposed process and the toolchain component developed to achieve it. Section 4 reports our experience about software engineering approach and experimentation feedback. Finally, Section 5 gives conclusions and outlines future work.

2 MBT toolchain overview

The goal of the project VETESS was to develop a toolchain based on the Smartesting MBT process, and to adapt it to address specific testing needs and requirements within the automotive domain. To achieve this goal, this project has focused both on MBT theoretical aspects and technical issues.

The theoretical aspects deal with the capability of the toolchain to take, as input models, representation of automotive embedded system, and the capacity to generate relevant test cases within mecatronic embedded

- 1 http://www.vehiculedufutur.com
- 2 http://www.smartesting.com
- 3 http://www.clemessy.com
- $^4 \ \mathtt{http://www.psa-peugeot-citroen.com}$
- 5 http://www.mips.crespim.uha.fr/
- 6 http://lifc.univ-fcomte.fr/

systems. These objectives have been reached by choosing SysML [6] language, as well as UML [15], to specify the test model, and by defining specific model coverage criteria to generate dedicated test cases for embedded system validation. Concerning technical issues, the main goal was to develop an enhanced integration with a modelling environment, a test generation engine and a test execution environment dedicated to embedded systems. A strategic issue is indeed to provide a full automated approach all the way from the test model to the execution of the generated test cases. These goals have been achieved by:

- using an open-source and Eclipse-based modeling tool, namely Topcased, to model the SUT,
- using Smartesting Test DesignerTM to automate the generation of test cases,
- exporting the generated test cases into a test manager and test execution environment (dedicated to embedded system validation process), namely the Clemessy TestInView platform,
- building up interactions between the modelling environment (Topcased), the test generation tool (Smartesting Test Designer TM) and the test execution platform (Clemessy TestInView) to ensure a fully automated approach.

All these technical choices have been lead by the current practices and interests of PSA end-user engineers, (UML/SysML modeling using open-source software), and by the technologies provided by the companies involved in the project (Smartesting Test Designer TM and Clemessy TestInView platform). Before introducing the overall developed toolchain and software engineering issues, each of its component is firstly described in the next subsections.

2.1 MBT process using Smartesting Test Designer TM

Smartesting company has released a Eclipse-based too-led MBT solution to generate and manage functional tests from behavioural models specified with a subset of UML notation called UML4MBT [3]. Symbolic execution techniques are applied to derive abstract test cases according to model coverage criteria or use-case scenarios. These generated abstract test cases can finally be concretized into executable test scripts that aim to evaluate functional conformance of the SUT with respect to the associated UML test model [1,2]. Smartesting Test Designer TM clearly defines the keystone of the toolchain proposed within the project VETESS. In this context, this toolchain can be seen as an extension of the existing Smartesting MBT tooled approach, which is depicted in the figure 2.

This approach thus makes it possible to apply the following MBT process:

- 1. A UML4MBT test model is written using IBM Rational Software Architect (RSA).
- 2. This model is exported into a proprietary pivot file that is managed by Test Designer TM in order to derive test cases from. A test case is composed of a sequence of operation calls with expected output results.
- 3. The generated abstract test cases are basically exported into XML proprietary files from which some ad-hoc API can be provided to translate the generated test cases into specific languages or specific environments.



Fig. 2 Smartesting MBT tooled approach.

2.2 UML/SysML modeling using Topcased

UML is widely used as a modelling support in industrial context and is today the main specification language for object modelling. Recently, to provide sufficient features to make this language useful for systems engineers, SysML profile has been created. Even if SysML is a recent modeling language, it is on the rise in industrial domain to specifically address system engineering issues, and several modeling tool already support SysML models. Within the project VETESS, in order to facilitate the integration of the existing tools (especially Smartesting Test Designer TM), and to ease delivery, extensibility and updatability of the toolchain, we decided to use an open-source and Eclipse-based modeling tool. We thus choose Topcased [17], which appeared, at the beginning of the project, the more mature technology satisfying these criteria. Topcased, which means Toolkit in OPen-source for Critical Application and SystEms Development, thus provides UML and SysML editors based on UML metamodel (and therefore they are compliant with OMG UML standard and SysML metamodel, derived from the OMG SysML Profile).

2.3 Test execution using Clemessy TestInView

TestInView (TIV) is a test execution platform based on a National Instruments hardware architecture (NI TestStand). It is designed to generate and acquire simple or complex electric signals and to import mathematical models (as Matlab/Simulink) that simulate the behaviour of an item of equipment that is absent from its future working environment. This platform can be used to describe the test sequences, to execute them to within the nearest millisecond and to automatically assess the expected results. One of the challenges of the VETESS project was to create an efficient translation from abstract test cases (embodied by the message sets as generated by Test Designer TM) into continuous signals intended to excite the System Under Test. Within the project VETESS, the test generated with Smartesting Test Designer TM are loaded by TestInView to be executed either on physical or simulated equipment.

2.4 Overview of the VETESS toolchain

The project VETESS gives rise to the toolchain depicted in the figure 3. The associated test process is defined as follows:

- 1. A UML or SysML model is realized using Topcased.
- 2. The standard UML or SysML model is translated into a UML4MBT or a SysML4MBT model. The UML4MBT metamodel was directly derived from [3] while the SysML4MBT metamodel was defined in the context of the project to define the SysML subset that can be handled by the toolchain.
- 3. In the case of SysML test model, the SysML4MBT file is transformed into a UML4MBT file to be managed by Smartesting Test Designer TM .
- 4. Smartesting Test DesignerTM generates test cases from the model stored in the UML4MBT file.
- 5. The generated test cases are then exported into Clemessy TestInView platform. During this step, an adaptation layer concretizes the abstract data of the generated test cases into concrete operation calls and values. This layer thus allows to automate the execution of the exported test cases on a simulated system or on a physical test bench.




Fig. 3 VETESS final toolchain.

The next section gives more details about each of these steps and details the dedicated tooling development making it possible to automate this process.

3 MBT process implementation

To automate the MBT process from UML and SysML models, the user functionalities are directly inspired by the current features of Smartesting Test Designer TM , which is the keystone of the toolchain. The implementation phase aims to adapt Smartesting Test Designer TM UML-MBT features to Topcased modeler, to extend it to take SysML models as input of the process, and to connect test generation results to Clemessy TestInView platform.

3.1 Test model design

The test model, specified with UML or SysML diagrams, defines the expected behavior of the SUT. It formalizes the control points and observation points of the system, and the expected dynamic behavior of the system by using OCL notations [21]. However, UML and SysML contain a large set of diagrams and notations that are defined with a flexible way and some freedom to support different semantical interpretations. So, for practical MBT, it is necessary to select a subset of UML and SysML, and clarify its semantics so that MBT tools can interpret the UML models.

Smartesting process natively defines such subset from UML, called UML4MBT, which is precise and complete enough to allow automated derivation of tests from these models. It should be underlined that such restrictions are often necessary in order for the test generation process to be reliable and/or scalable [16,8]. Thus, a UML4MBT model has to contain at least one UML class diagram to represent the static view of the system (with classes, associations, enumerations, class attributes and operations) and at lest one UML Object diagram to list the concrete objects used to compute test cases and to define the initial state of the system (it must be an instantiation of the associated Class diagram). The dynamic view can be modelled by OCL expressions on pre or postcondition of class operations, and/or by a Statemachine diagram (annotated with OCL constraints). OCL expressions must actually conform to a subset of the OCL language. As an example, the iterate operation is not supported (more details available in [3]). A UML4MBT Statemachine has some restrictions: it cannot contain parallel states, historic states, fork and join states, and trans-hierarchical transitions.

Within project VETESS, the UML4MBT expressiveness and its restrictions have been integrally preserved. However, we have defined the subset of SysML language, called SysML4MBT, to be supported for test generation. A SysML model has to contain at least one Block Definition Diagram to represent the static view of the system (with blocks, associations, compositions, enumerations, properties, operations, signals, flow ports...), at least one Internal Block Diagram to formalize interconnections between blocks, and at least one Statemachine diagram to specify the dynamic view of the system. SysML4MBT Statemachine can contain much more elements than UML4MBT Statemachine: fork/join, historic and parallel states are indeed allowed. About OCL annotations, the circumflex $(^{\land})$ is allowed to enable signal sending.

A dedicated Eclipse-based plugin was developed to customize and extend Topcased UML and SysML modelling capabilities, and to connect it to Smartesting Test Designer TM . The UML4MBT version of this Eclipse plugin is depicted in the figure 4 (in the remainder of this section, to simplify the presentation of the plugin functions, we only describe UML4MBT plugin since SysML4MBT plugin offers the same services).

The UML4MBT Topcased plugin functionalities can be divided into verification and test generation features. Firstly, the verification panels allow designing and checking the correctness of the models with:

- 1. Syntactical verification (item 1 in figure 4), which checks that the UML model satisfies UML4MBT restrictions and verify the absence of errors.
- 2. Functional verification of the model can be performed using a simulator that animates the model, and allows to check manually the correctness of modelled behaviours (frame 2 in figure 4).
- 3. To complete the native Topcased design facilities, a specific OCL editor (frame 6 in figure 4) has been developed to help engineer specifying OCL constraints (syntactical colouring, completion...).

When the syntactical verification process does not find any errors (status is displayed in the frame 3 of figure 4), it is possible to use the following functionalities addressing test generation features:

- 1. The scenario manager (frame 4 in figure 4) allows to create scenarios (sequences of operation calls) that will be exported as user test cases.
- 2. The test suite organizer (frame 5 in figure 4) makes it possible to manage several test suites (for instance by filtering model element to be covered by the test generation algorithm).

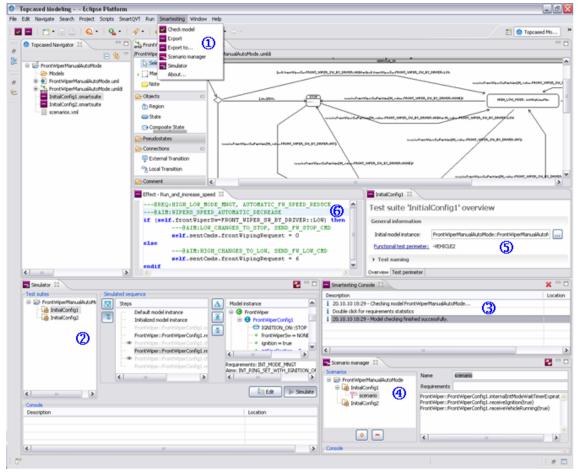


Fig. 4 All windows of the VETESS UML plugin.

Finally, in order to generate test cases, user can export the test model in a dedicated XML file, which defines the connection with Smartesting Test Designer TM . The next section gives details about the model transformations performed during this export step.

3.2 Test model export

The Test DesignerTM input models are serialized with a XML dialect called TDMODEL. As such, it was necessary to develop software components so that UML and SysML models designed in Topcased can be automatically processed by Test DesignerTM to generate abstract test cases from. The developed components, which appear at the left-hand side of figure 3, are the following:

- 1. The UML4MBT metamodel.
- 2. A translation tool inputting UML4MBT models and outputting equivalent TDMODEL models.
- 3. A model transformation inputting UML2 models as designed in Topcased and outputting equivalent UML4MBT models.

- 4. The SysML4MBT metamodel that states which concepts of SysML are to be supported by the VETESS toolchain.
- 5. A model transformation inputting SysML models as designed in Topcased and outputting SysML4MBT models
- 6. A model transformation inputting SysML4MBT models and outputting UML4MBT models so that test cases can be generated from SysML models by the Test Designer TM tool.

Topcased, following the example of IBM Rational Software Architect (RSA), relies on the Eclipse Modeling Framework (EMF)⁷ for managing models. Such models must conform to a metamodel described in the Ecore metamodeling language. In order for the tool chain to seamlessly integrate Topcased (or any other EMF-based tool), the UML4MBT and SysML4MBT metamodels have been defined in Ecore. Since an EMF model can be easily manipulated in Java, we developed our transformations in Java.

⁷ http://www.eclipse.org/modeling/emf/

We chose not to develop our transformations using a dedicated model transformation language such as QVT [14] for avoiding to embed a model transformation interpretor, and thus simplifying the integration process.

UML4MBT was merely designed as a one-to-one translation of the TDMODEL language, which is actually defined by a metamodel written in Java. The graph of Java objects that represents a model can be serialized and deserialized in XML using the XStream tool⁸. As such, the translation from UML4MBT to TD-MODEL is just one-to-one translation between models of the same nature but with different (Java-based) technologies. The translation tools makes thus possible for a UML4MBT model to be processed to generate test cases. The translation was made reversible in order for the legacy TDMODEL models to be processed in an EMF-based environment. For UML2 models designed in Topcased to be processed the same way, a model transformation was developed so that they are transformed into UML4MBT models. As TDMODEL was inspired by (a subset of) UML1.4, UML4MBT also looks like (a subset of) UML1.4 [3]. As such, the UML2 to UML4MBT transformation looks like a UML2 to UML1.4 translation for a subset of UML concepts.

SysML4MBT was also formalized as an Ecore metamodel. One important point in that numerous concepts are shared between UML4MBT and SysML4MBT. Example such concepts are project, state-machine, and package. As there was a need to translate SysML4MBT models into UML4MBT models in order to generate test cases from SysML4MBT models, there was much to be gained if those two metamodels could keep as similar as possible. This is the reason why we decided to describe it as a UML4MBT dialect, i.e. UML4MBT with some additional concepts (e.g. block) and some other concepts dropped (e.g. instance). In order to create SysML4MBT, we thus added necessary concepts to UML4MBT using the package merge mechanism [13], following the example of the UML metamodel. Moreover, we developed the package unmerge mechanism as the package merge counterpart in order to remove those concepts from UML4MBT that are meaningless in SysML4MBT. We then obtained the SysML4MBT metamodel by applying those changes to UML4MBT.

Moreover, we were able to create the one-to-one transformation from SysML4MBT to UML4MBT for those concepts which were shared between the two metamodels. This latter transformation needed to be complemented in order for the concepts added to UML4MBT to be transformed in elements of UML4MBT. An ex-

haustive introduction of this transformation and dedicated translation rules can be found in [11].

Finally, a model transformation was developed to create SysML4MBT models from standard SysML models as designed in Topcased. To ensure compatibility between toolchain components and obtain more homogeneous code, it should be noted that this model transformation was not implemented using dedicated language, such as ATL [10], but with Java code. Since supported concepts of SysML were all made available in SysML4MBT, the transformation was easy to develop.

3.3 Test case generation and execution

Once the model has been exported (including the translation into UML4MBT language in the case of SysML model), abstract test cases can be automatically generated using test generation strategy implemented in Smartesting Test Designer TM (see figure 5). This strategy basically ensures the covering of each behaviour of the system: it means that, for each behaviour specified in the initial UML or SysML model, at least one test case reaches this behaviour.

Once test cases are generated, a specific publisher is necessary to translate the generated abstract test cases into executable test scripts. This step relates to several issues:

- Generated test cases refer to discrete dimension and the system to be tested is often continuous.
- Observation should be managed to establish a test verdict.
- Delaying and performance aspects.

To address these items, abstract test cases are translated into test scripts, which are directly executable by an execution environment dedicated to embedded system features, namely Clemessy TestInView platform (see figure 6). A dedicated Java publisher (called adaptation layer) has been developed to export generated test cases to a TestInView file. Moreover, a specific TestStand file is also generated: it defines the test execution patterns (TestInView steps that are necessary to execute the test cases: for example initialization, simulation model loading, tests execution...), and the concretization mapping table of operations used by abstract test cases. This generated table has to be manually filled to map each abstract operations to simulated or real concrete actions.

Finally, to manage continuous system, a last step consists to create real-time test vectors, which are used to define stimuli temporal sequences with an accuracy to one millisecond. Each test is also defined with one specific test vector, which represents the situation of the

⁸ http://xstream.codehaus.org/

system in a continuous way. In order to define such realtime test vector, a specific Matlab component has been developed to automatically concretize the generated abstract test cases. This environment, which is fully integrated to the toolchain, makes it possible to execute test scripts both on simulated system or real physical test bench.





Fig. 5 Smartesting Test Designer TM interface



 ${\bf Fig.~6~~Clemessy~TestInView~interface}$

The next section relates to our experience about software engineering issues and Agile development process, which made it possible to experiment this toolchain very soon during the VETESS project.

4 Software engineering features and experimentations

The motivation of the toolchain consists in demonstrating that MBT approach can efficiently address embedded system validation needs within automotive domain. To reach this goal, we decided to be driven by casestudies and end-user requirements and feedbacks. This approach leads to deliver toolchain releases early and frequently during the project. In the context of this project (about 10 development engineers were involved during one and a half years, and about 100 kilometers separates the different development teams of the project), one important issue concerns the management of scattered development team regarding the common vision of the product, code conflicts and functionality stability. To be able to nevertheless deliver reliable releases of toolchain, our development methodology has followed most of the principles of Agile software development [9] such as:

- Incremental and iterative process including requirements. analysis, design, coding, unit testing and acceptance testing.
- Close interaction and cooperation between developers with a lot of pair programming sessions between academic and industrial partners.
- Face-to-face meeting between developers and endusers (almost one per month).
- Obtaining functional software is more priority than writing a lot of short-lived documentation, which are time consuming.

As mentioned in the previous section, all developments have been performed using Java language to maintain the code homogeneous and to facilitate the integration of the components into the toolchain based on Smartesting Test Designer TM , which is fully developed with Java. To coordinate development, the following technical approaches and resources have been achieved:

- The whole source code is stored in a Subversion⁹ source control repository in order to save all code versions and to easily share it with all project contributors.
- JUnit tests are developed to cover the executable code of the toolchain.
- The process of building the toolchain release is automated using MAVEN¹⁰, which automatically compiles Java code and running tests each time Hudson requests it.

 $^{^{9}}$ http://subversion.tigris.org

 $^{^{10}}$ http://maven.apache.org

To provide a continuous integration and uninterrupted non-regression verification, HUDSON¹¹ software manages the process of building the software and running the tests each time code is committed in the source repository by calling MAVEN.

Early and frequent stable releases of the toolchain made it possible to experiment and evaluate our approach on several case studies during the two year project. The most advanced case study, called "Steering", deals with the specification of the steering column of a car: road variations activate the column through the steering wheel and tyres. The obtained results and feedbacks given by users about each of these experimentations in terms of test relevance, process reliability and approach scalability were always straightaway taken into account to incrementally improve the MBT tooled process and toolchain presented in this paper.

Finally, it can be underlined that the case study "Steering" gives rise to the generation of 154 tests (from a SysML model) that have been executed both on simulation platform and physical vehicle front test bench, as illustrated respectively in figures 7 and 8. A short videotape, describing and exemplifying the toolchain with this case study (including SysML model description), is available at [20]. Finally, more details about modelling and testing techniques can be found in [12].




Fig. 7 Simulated environment screenshot

5 Conclusions and future work

This paper reports about the results and our experience with building an MBT toolchain prototype that aims to automate the generation of executable test scripts from either UML or SysML models, which specify the expected behaviours of the embedded System Under Test. This prototype is based on existing tools that



Fig. 8 Physical test bench picture

have been adapted and customized to achieve testing process automation. From UML or SysML behavioural models, symbolic execution techniques, embedded in Smartesting dedicated generation tool, are applied to derive abstract test cases according to model coverage criteria. These abstract test cases are then concretized into executable test scripts that aim to evaluate functional conformance of the developed system with respect to the initial UML or SysML models. Several case-studies has been successfully experimented, and made the proof-of-concept that such MBT approach from UML and SysML notations is suitable and can gain benefits within automotive embedded system validation in an industrial context. The use of formal UML/SysML model to derive test cases indeed allows, in the one hand, to increase safety and quality, and in the other hand, it facilitates the detection of imprecision and inconsistencies in functional requirements during the earliest stages of the software life cycle. Moreover, this MBT toolchain prototype offers an integrated approach and continuous process that appear to be strategic issues in moving MBT techniques and methodologies to embedded system domain.

The future challenges mainly deal with scalability issues especially about model expressiveness and test case generation time. These scopes of improvement can be addressed, among other, by increasing the UML4MBT and SysML4MBT subsets to address component-based architecture, and by implementing specific model evaluation rules to derive test cases from UML/SysML models. We also plan to manage real-time issues by using the UML MARTE profile [7]: this feature will make it possible to manage real-time constraints in the test model [5], and thus will allow to generate new types of test cases. Smartesting company are notably entering these issues within the ITEA2 project VERDE [19] that aims to develop a solution for iterative/incremental development and validation of Real-Time Embedded System.

¹¹ http://hudson-ci.org

Acknowledgements The authors would like to thank all people who were involved in the project VETESS, especially M. Alter, M. Bernhard and C. Scherrer from Clemessy, S. Colin and B. Legeard from Smartesting, F. Bouquet and E. Oudot from LIFC, J. Guillet, P.-A. Muller and B. Wittmann from MIPS, and R. May from PSA.

References

- Bernard, E., Bouquet, F., Charbonnier, A., Legeard, B., Peureux, F., Utting, M., Torreborre, E.: Model-based testing from UML models. In: Proceedings of the International Workshop on Model-based Testing (MBT'2006), LNCS, vol. 94, pp. 223–230. Springer Verlag, Dresden, Germany (2006)
- Bouquet, F., Grandpierre, C., Legeard, B., Peureux, F.: A test generation solution to automate software testing. In: Proceedings of the 3rd International Workshop on Automation of Software Test (AST'08), pp. 45–48. ACM Press, Leipzig, Germany (2008)
- Bouquet, F., Grandpierre, C., Legeard, B., Peureux, F., Vacelet, N., Utting, M.: A subset of precise UML for model-based testing. In: Proceedings of the 3rd International Workshop on Advances in Model Based Testing (A-MOST'07), pp. 95–104. ACM Press, London, UK (2007)
- Dias-Neto, A., Travassos, G.: A Picture from the Model-Based Testing Area: Concepts, Techniques, and Challenges. Advances in Computers 80, 45–120 (2010). ISSN: 0065-2458
- Espinoza, H., Cancila, D., Selic, B., Gérard, S.: Challenges in combining sysml and marte for model-based design of embedded systems. In: Proceedings of the 5th European Conference on Model Driven Architecture Foundations and Applications (ECMDA-FA'09), pp. 98–113. Springer-Verlag, Berlin, Heidelberg (2009)
- Friedenthal, S., Moore, A., Steiner, R.: A Practical Guide to SysML: The Systems Modeling Language. Morgan Kaufmann OMG Press (2009). ISBN 978 0 12 374379 4
- Group, O.M.: UML Profile for MARTE, draft revised submission. OMG document number realtime/07-03-03L4.1, OMG (2007)
- Herrmannsdoerfer, M., Ratiu, D., Koegel, M.: Metamodel usage analysis for identifying metamodel improvements. In: Proceedings of the 3rd International Conference on Software Language Engineering (SLE'10), LNCS, vol. 6563, pp. 62–81. Springer Verlag, Eindhoven, the Netherlands (2010)
- Highsmith, J.: Agile software development ecosystems. Addison-Wesley (2002). ISBN 0-201-76043-6
- Jouault, F., Kurtev, I.: Transforming Models with ATL, LNCS, vol. 3844, pp. 128–138. Springer Verlag (2006)
- Lasalle, J., Bouquet, F., Legeard, B., Peureux, F.: SysML to UML model transformation for test generation purpose. In: Proceedings of the 3rd International Workshop on UML and Formal Methods (UML&FM'10). Shanghai, China (2010)
- Lasalle, J., Peureux, F., Guillet, J.: Automatic test concretization to supply end-to-end MBT for automotive mecatronic systems. In: Proceedings of the 1st International Workshop on End-to-End Test Script Engineering (ETSE'11), pp. 16–23. ACM, Toronto, Ontario, Canada (2011)
- 13. Object Management Group: Unified Modeling Language (UML) infrastructure specification, version 2.3. OMG Document formal/2010-05-03 (2010)

- Object Management Group: Meta Object Facility (MOF)
 Query/View/Transformation Specification, v. 1.1.
 OMG Document formal/2011-01-01 (2011). MOF QVT
 Final Adopted Specification
- 15. Rumbaugh, J., Jacobson, I., Booch, G.: The Unified Modeling Language Reference Manual, 2^{th} edn. Addison-Wesley (2004). ISBN 0-321-24562-8
- Sen, S., Moha, N., Baudry, B., Jézéquel, J.M.: Metamodel pruning. In: Proceedings of the 12th International Conference on Model Driven Engineering Languages and Systems (MODELS'09), LNCS, vol. 5795, pp. 32–46. Springer Verlag, Denver, CO, USA (2009)
- 17. Topcased: Toolkit in OPen-source for Critical Application and SystEms Development. http://www.topcased.org (2010)
- Utting, M., Legeard, B.: Practical Model-Based Testing

 A tools approach. Elsevier Science (2006). ISBN 0-12-372501-1
- 19. Web site of the project ITEA2 VERDE. http://www.itea-verde.org (2010)
- 20. Web site of the project VETESS. http://lifc.univ-fcomte.fr/VETESS (2010)
- Warmer, J., Kleppe, A.: The Object Constraint Language: Precise Modeling with UML. Addison-Wesley (1996). ISBN 0 201 37940 6
- Zhu, H., Belli, F.: Advancing test automation technology to meet the challenges of model-based software testing. Journal of Information and Software Technology 51(11), 1485–1486 (2009)